









Assembly instructions for the exhibition stand I109



consisting of:


- 8x Aluminium profiles à 1250 mm incl. 8 bores
- 8x Aluminium profiles à 1250 mm incl. 8 bores and adjustable feet
- 14x Aluminium cross profiles with pointed screws for the lower and upper mounting
- 7x Aluminium cross profiles for the middle mounting
- 28x H-profiles à 1200 mm to stabilize the panels
- 14x PVC rigid foam panels à 952 x 1212 mm
- 8x Extension bolts for aluminium profile
- 3x Longarm spotlights 450mm incl. bulb




Important during assembly

Pointed screws must be used for all profiles with screw holes.


1. Mount the bottom cross profiles including the pointed screws to form the corner.

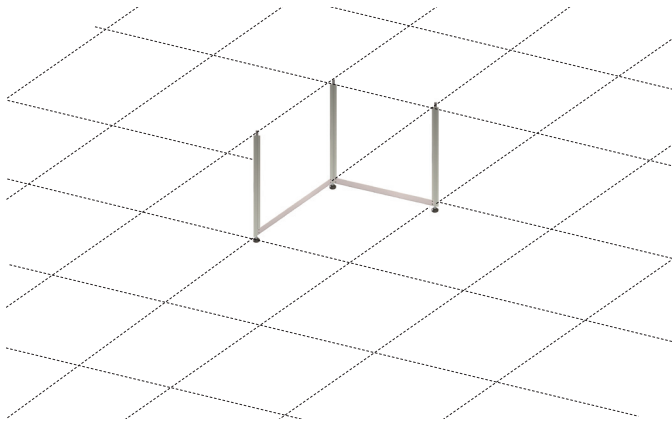


2. Insert the lower panels with the H-profiles and then mount the cross profiles.

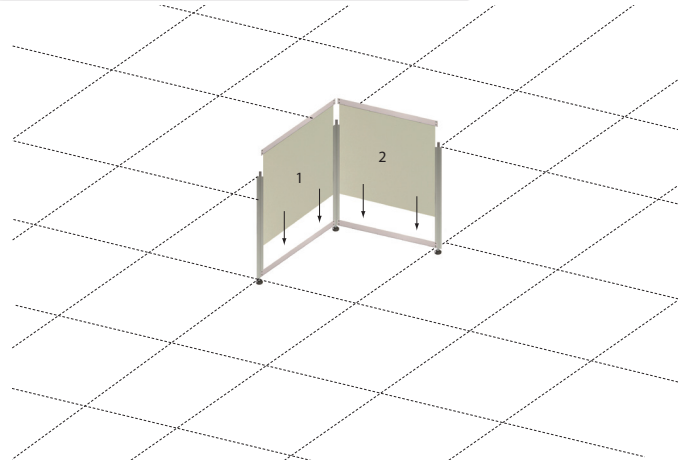


3. Mount the required lower cross profiles including pointed screws.

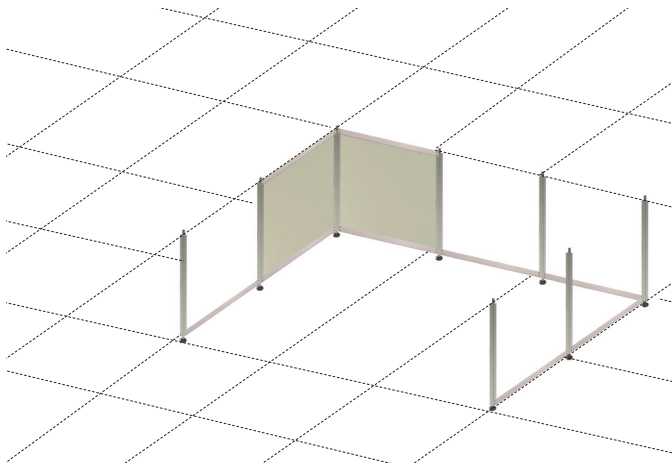


4. Insert the remaining panels with the H-profiles one after the other and then mount the cross profiles.

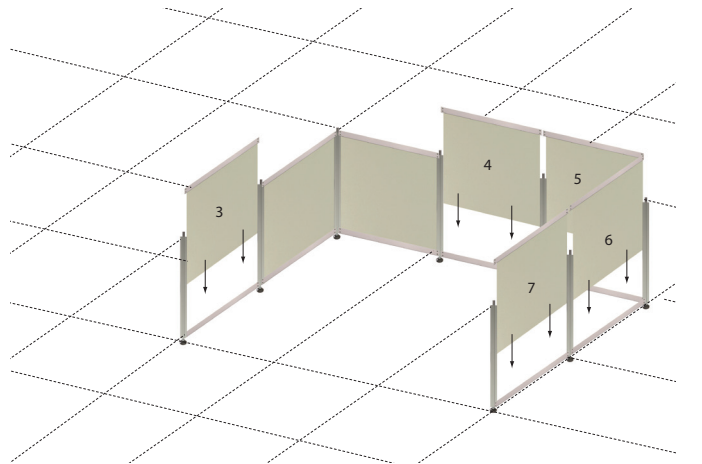


5. Insert the bolts in the profile.

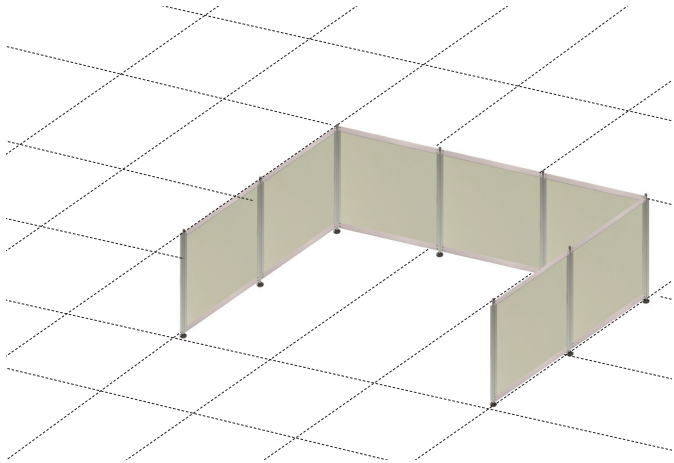

6. Push the top profiles onto the bolts.
Ensure that the holes face upward.

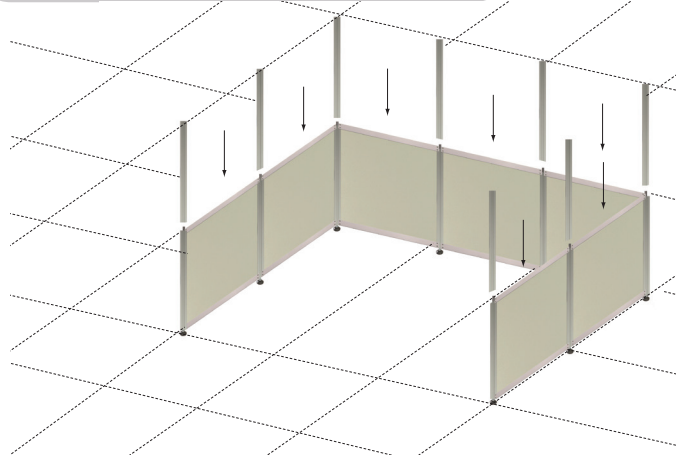

7. Insert the upper panels with the
H-profiles one after the other and
then mount the cross profiles
including the pointed screws.

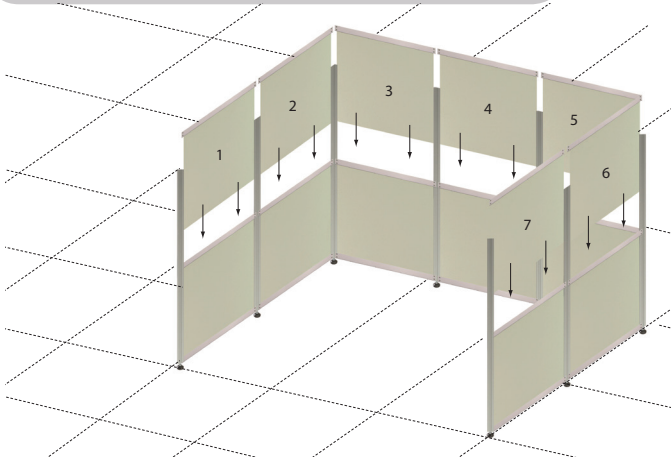

8. Fully assembled exhibition stand.
If necessary, use the adjustable feet
to compensate for unevenness in the floor.

